# STAGE PRO ACTIVE 15

***15” 2 Way Active Speaker***

- Diffusore a 2 vie attivo in legno multistrato
- Woofer 15”
- Tweeter a compressione 45 mm



## Specifications


| | |
|---|---|
| Nominal power | 350 W |
| Maximum power | 580 W |
| Total Max SPL | 129 dB |
| Frequency Response | 45 ÷ 20000 Hz ( ± 3 dB) |
| Lo-Pass Filter Woofer | 1400 Hz - 12 dB/Oct (Passive) |
| HI-Pass Filter Tweeter | 3200 Hz - 12 dB/Oct (Passive) |
| Woofer Voice Coil | 75 mm |
| Tweeter Voice Coil | 45 mm |
| Net weight | 33.0 kg |




## Woofer Parameters

| | |
|---|---|
| Fs | |
| Vas | |
| Qts | |
| Qes | |
| Qms | |
| Re | 3.40 ohm |
| D | |
| Cms | |
| Mms | |
| Bl | |
| SPL | |


## Frequency Response

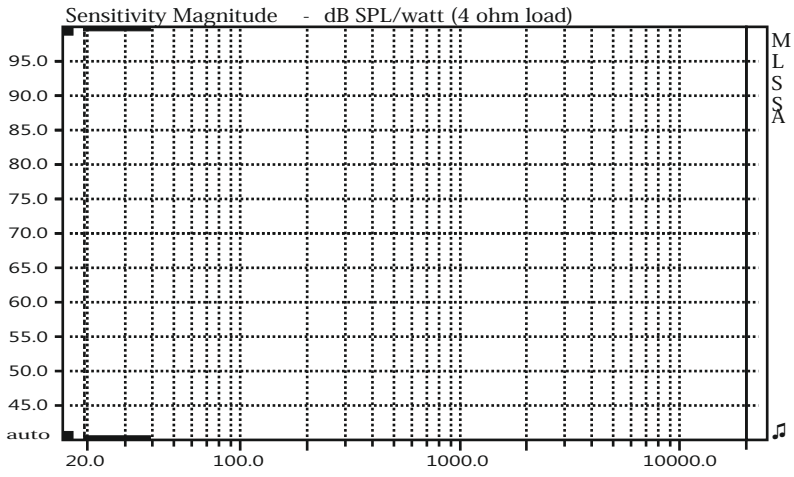


## Rear Panel

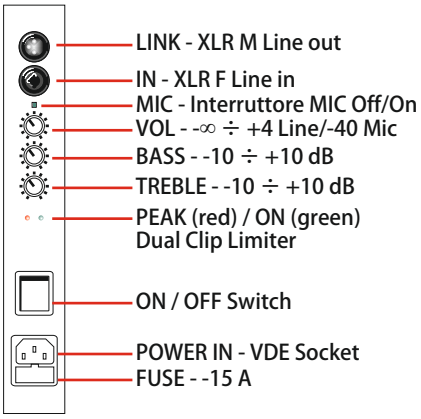


## Mechanical Drawing

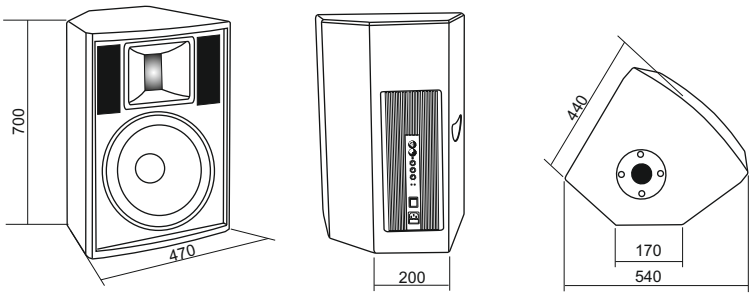


## Characteristics

| | |
|---|---|
| Cabinet | Plywood |
| | Bass Reflex |
| | No-Scratch Black Painting |
| | Support Hole ø 35 mm |
| | Asymmetric construction |

# STAGE PRO ACTIVE 215

***2 x 15" 2 Way Active Speaker***

- Diffusore a 2 vie attivo in legn multistrato
- Doppio Woofer 15"
- Tweeter a compressione da 51 mm



## Specifications


| | |
|---|---|
| Nominal power | 600 W |
| Maximum power | 1200 W |
| Total Max SPL | 136 dB |
| Frequency Response | 43 ÷ 20000 Hz ( ± 3 dB) |
| Lo-Pass Filter Woofer | 2500 Hz - 12 dB/Oct (Passive) |
| HI-Pass Filter Tweeter | 5000 Hz - 18 dB/Oct (Passive) |
| Woofer Voice Coil | 75 mm |
| Tweeter Voice Coil | 51 mm |
| Net weight | 74.0 kg |




## Woofer Parameters

| | |
|---|---|
| Fs | 41.48 ÷ 43.40 Hz |
| Vas | 143.54 ÷ 153.38 l |
| Qts | 0.42 ÷ 0.43 |
| Qes | 0.43 ÷ 0.45 |
| Qms | 12.44 ÷ 14.43 |
| Re | 6.20 ÷ 6.40 ohm |
| D | 337 mm |
| Cms | 0.13 ÷ 0.14 m/N |
| Mms | 104.07 ÷ 104.80 g |
| Bl | 19.85 ÷ 20.15 N/A |
| SPL | |


## Frequency Response

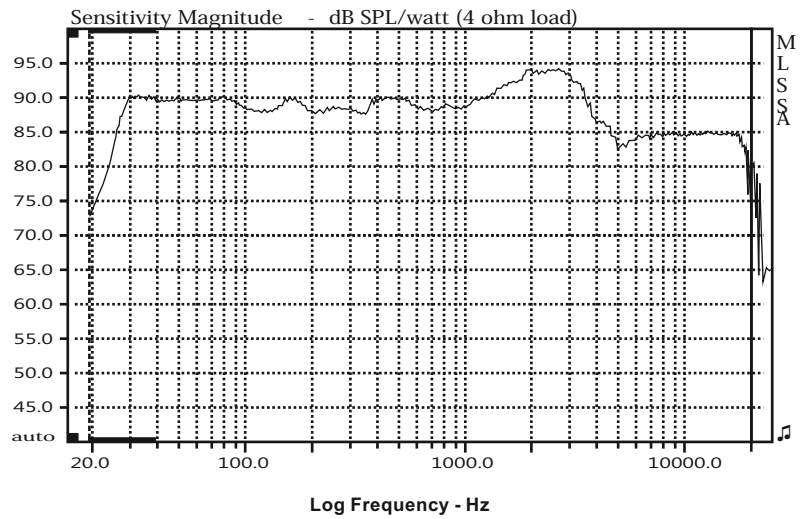


## Rear Panel

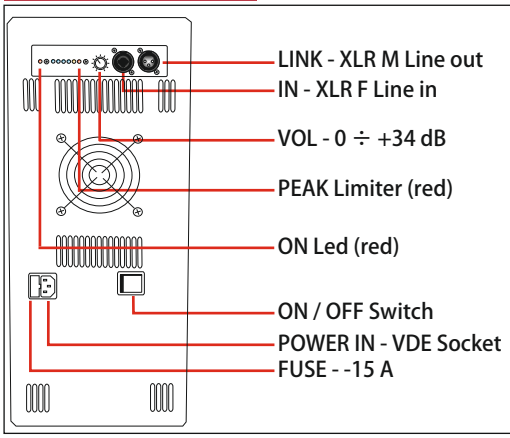


## Mechanical Drawing

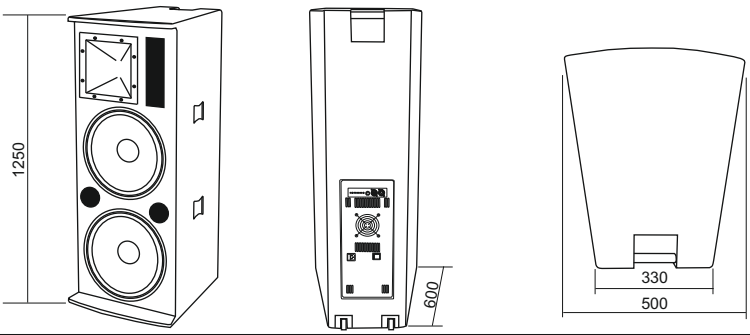


## Characteristics

| | |
|---|---|
| Cabinet | Plywood |
| | Bass Reflex |
| | Integrated handles |
| | Integrated bottom wheels |
| | 12° angled construction |

# STAGE PRO ACTIVE 18W

***18" Active Subwoofer***

- **Subwoofer attivo in legno MDF ad alta densità**
- **Woofer 18"**
- **Bass Reflex**



## Specifications


| | |
|---|---|
| Nominal power | 500 W |
| Maximum power | 1000 W |
| Total Max SPL | 128 dB |
| Frequency Response | 20 ÷ 150 Hz ( ± 3 dB) |
| Lo-Pass Filter Woofer | 120 Hz - 12 dB/Oct |
| Woofer Voice Coil | 100 mm |
| Surround | Coated Cloth |
| Net weight | 54.0 kg |
| * | |




## Woofer Parameters

| | |
|---|---|
| Fs | |
| Vas | |
| Qts | |
| Qes | |
| Qms | |
| Re | 3.40 ohm |
| D | |
| Cms | |
| Mms | |
| Bl | |
| SPL | |


## Frequency Response

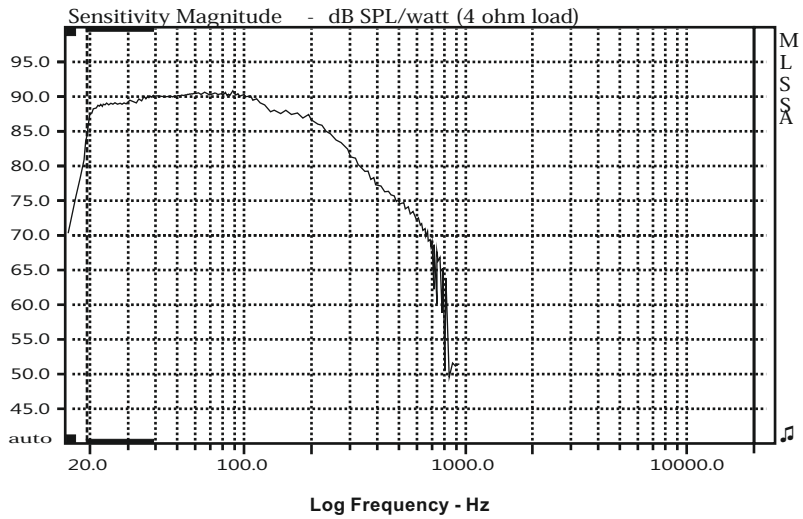


## Rear Panel

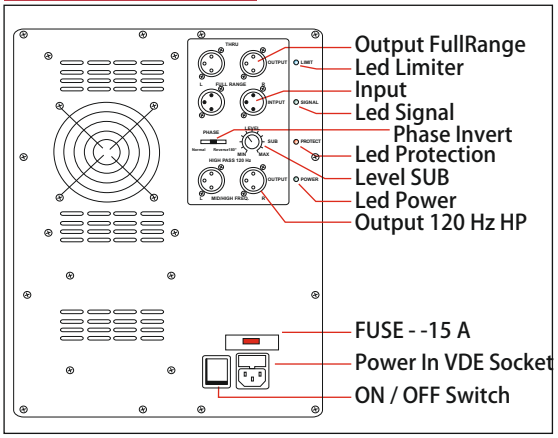


## Mechanical Drawing

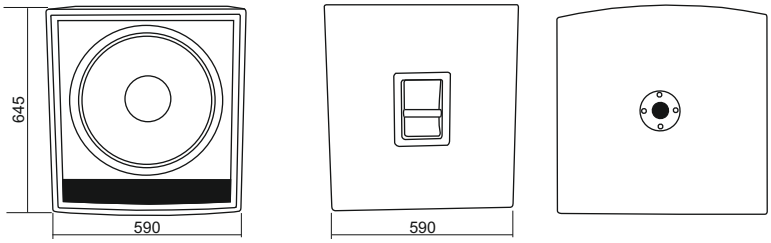


## Characteristics

| | |
|---|---|
| Cabinet | High Density MDF |
| | Bass Reflex |
| | No-Scratch Black Painting |
| | Support Hole ø 35 mm |
| | Integrated handles |