LIVE PRO 8

8” 2 Way Active Speaker

- Diffusore a 2 vie attivo in ABS iniezione a gas
- Woofer 8”
- Tweeter a compressione 25 mm



Specifications


Nominal power	140 W + 40 W
Maximum power	300 W
Total Max SPL	118 dB
Frequency Response	60 ÷ 18000 Hz (± 3 dB)
Dispersione angolare	90° H - 60° V
Bi-Amplificazione	Classe AB / Classe AB
Woofer Voice Coil	32 mm
Tweeter Voice Coil	25 mm
Net weight	8.5 kg




Woofer Parameters

Fs	52.07 Hz
Vas	32.53
Qts	0.37
Qes	0.42
Qms	2.98
Re	3.2 ohm
D	165 mm
Cms	0.51 m/N
Mms	18.33 g
Bl	6.79 N/A
SPL	


Frequency Response

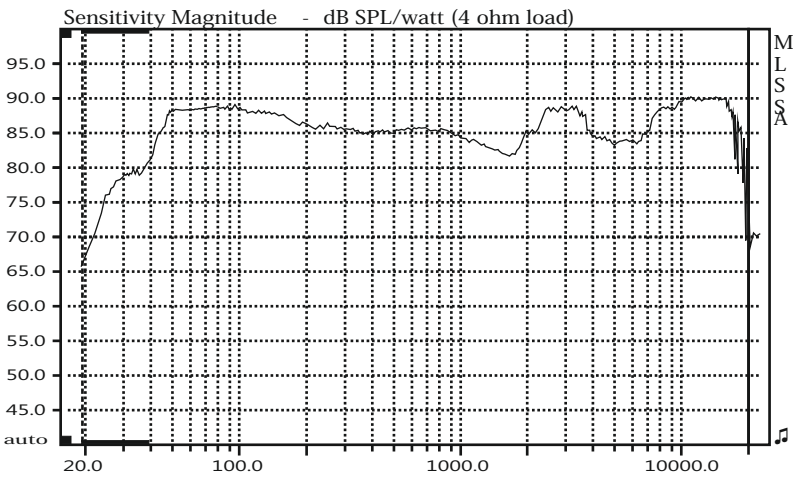

Rear Panel

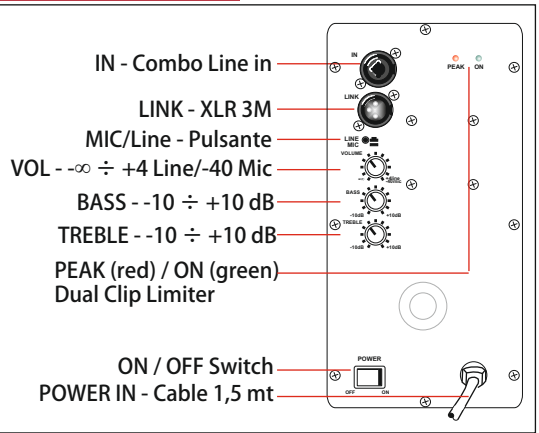

Mechanical Drawing

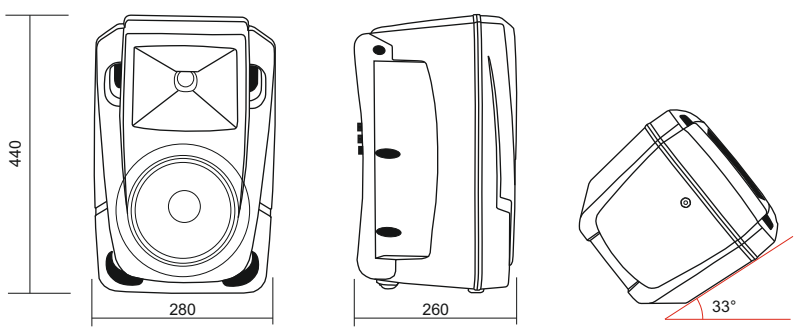

Characteristics

Cabinet	Black Gas injection molding
	Dual Bass Reflex
	Built-in upper and lower M6 nuts
	Support Hole ø 35 mm
	33° angle for monitor position

LIVE PRO 10

10” 2 Way Active Speaker

- **Diffusore a 2 vie attivo in ABS iniezione a gas**
- **Woofer 10”**
- **Tweeter a compressione 34 mm**



Specifications


Nominal power	200 W + 50 W
Maximum power	400 W
Total Max SPL	124 dB
Frequency Response	50 ÷ 20000 Hz (± 3 dB)
Dispersione angolare	90° H - 60° V
Bi-Amplificazione	Classe H / Classe AB
Woofer Voice Coil	50 mm
Tweeter Voice Coil	34 mm
Net weight	15.8 kg




Woofer Parameters

Fs	63.23 Hz
Vas	23.81
Qts	0.59
Qes	0.61
Qms	16.62
Re	3.3 ohm
D	210 mm
Cms	0.14 m/N
Mms	45.14 g
Bl	9.86 N/A
SPL	


Frequency Response

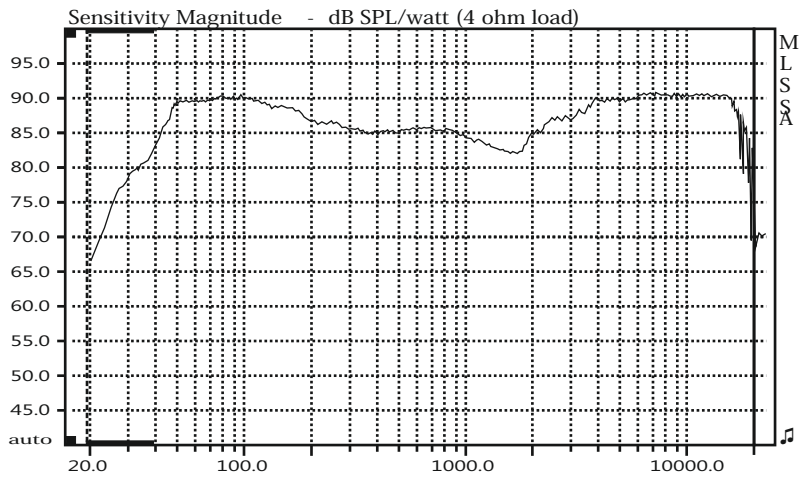

Rear Panel

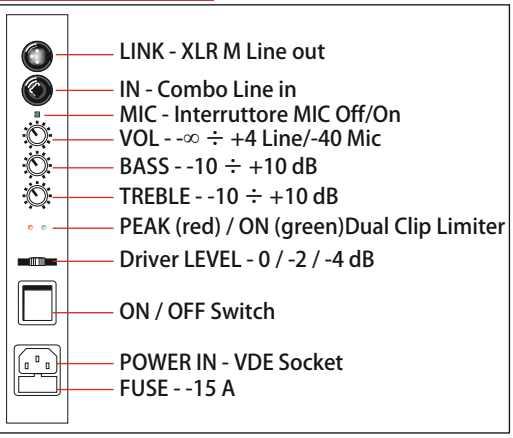

Mechanical Drawing

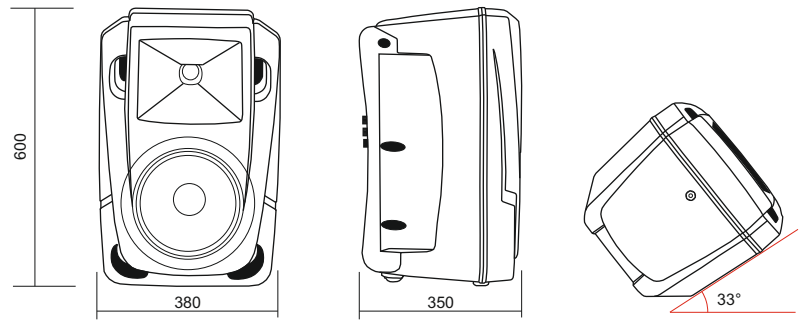

Characteristics

Cabinet	Black Gas injection molding
	Dual Bass Reflex
	Built-in upper and lower M8 nuts
	Support Hole ø 35 mm
	33° angle for monitor position

LIVE PRO 12

12” 2 Way Active Speaker

- Diffusore a 2 vie attivo in ABS iniezione a gas
- Woofer 12”
- Tweeter a compressione 34 mm



Specifications


Nominal power	250 W + 50 W
Maximum power	500 W
Total Max SPL	127 dB
Frequency Response	45 ÷ 20000 Hz (± 3 dB)
Dispersione angolare	90° H - 60° V
Bi-Amplificazione	Classe H / Classe AB
Woofer Voice Coil	50 mm
Tweeter Voice Coil	34 mm
Net weight	20.5 kg




Woofer Parameters

Fs	52.29 Hz
Vas	64.07
Qts	0.41
Qes	0.42
Qms	13.53
Re	3.1 ohm
D	260 mm
Cms	0.16 m/N
Mms	56.92 g
Bl	11.77 N/A
SPL	


Frequency Response

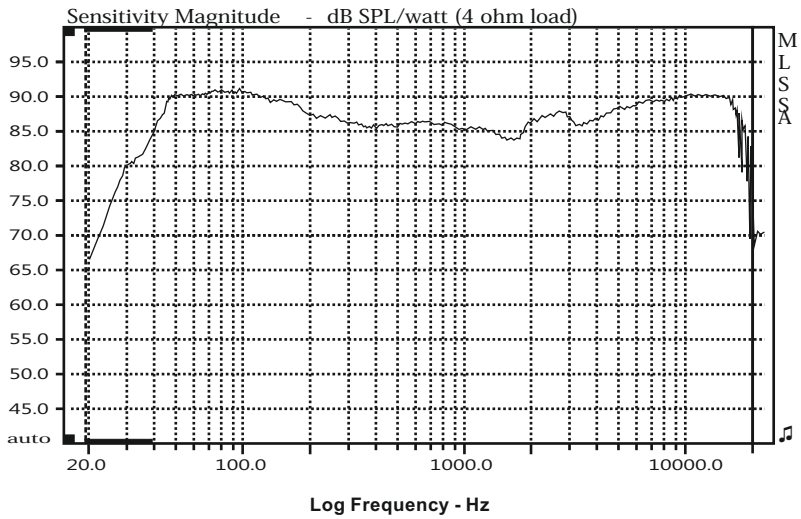

Rear Panel

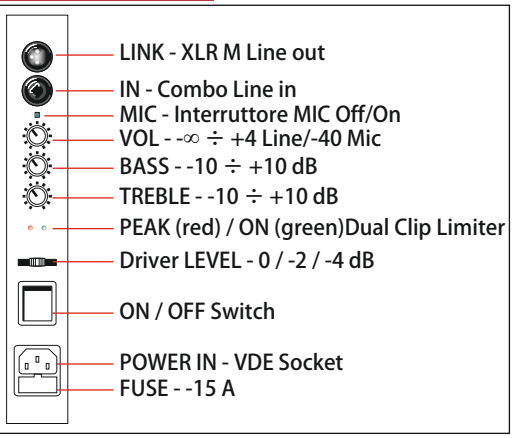

Mechanical Drawing

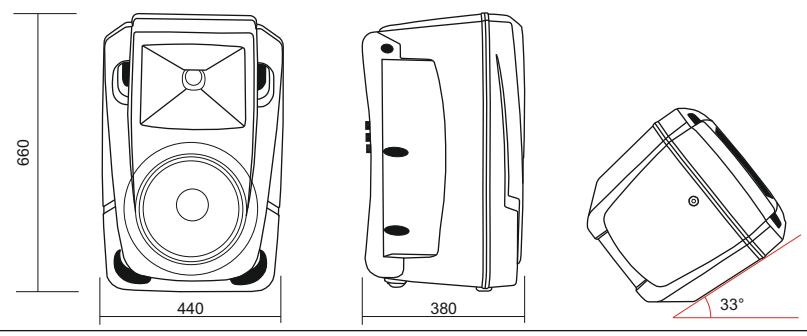

Characteristics

Cabinet	Black Gas injection molding
	Dual Bass Reflex
	Built-in upper and lower M8 nuts
	Support Hole ø 35 mm
	33° angle for monitor position

LIVE PRO 15

15” 2 Way Active Speaker

- Diffusore a 2 vie attivo in ABS iniezione a gas
- Woofer 15”
- Tweeter a compressione 34 mm



Specifications


Nominal power	300 W + 50 W
Maximum power	580 W
Total Max SPL	129 dB
Frequency Response	45 ÷ 20000 Hz (± 3 dB)
Dispersione angolare	90° H - 60° V
Bi-Amplificazione	Classe H / Classe AB
Woofer Voice Coil	65 mm
Tweeter Voice Coil	34 mm
Net weight	24.2 kg




Woofer Parameters

Fs	36.53 Hz
Vas	209.3
Qts	0.55
Qes	0.57
Qms	11.89
Re	3.7 ohm
D	337 mm
Cms	0.19 m/N
Mms	100.74 g
Bl	12.22 N/A
SPL	


Frequency Response

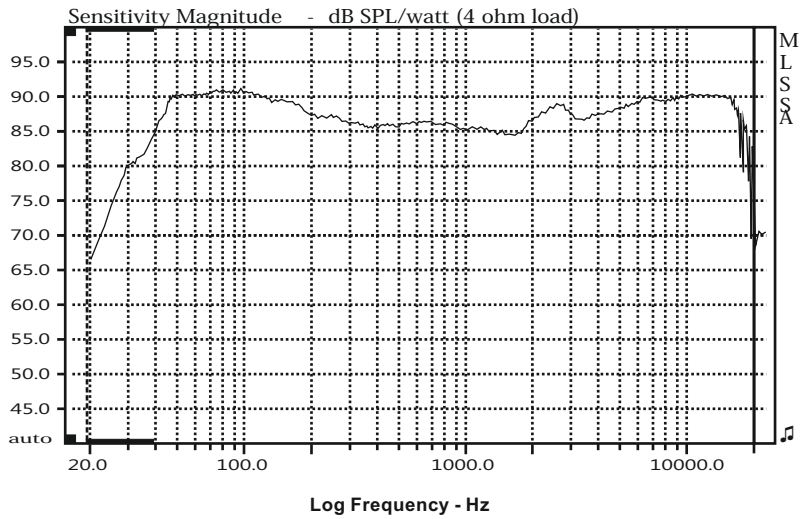

Rear Panel

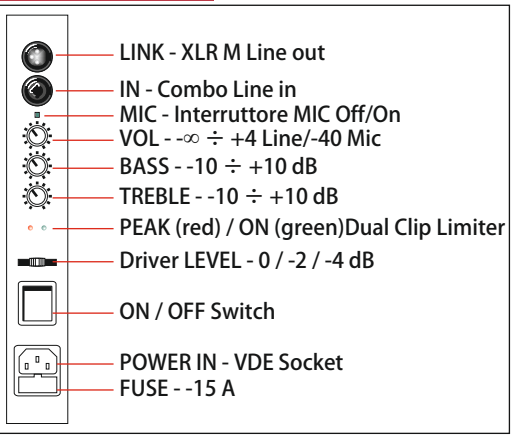

Mechanical Drawing

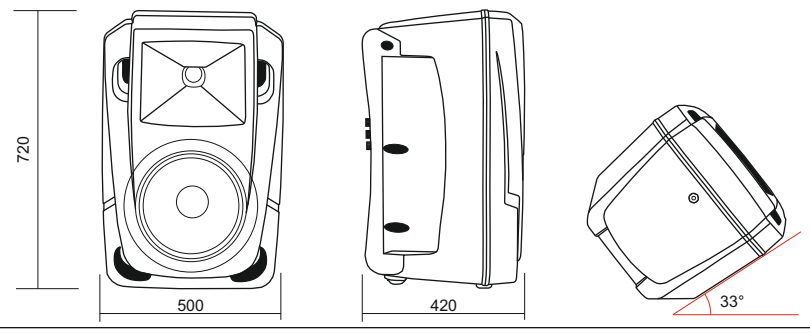

Characteristics

Cabinet	Black Gas injection molding
	Dual Bass Reflex
	Built-in upper and lower M8 nuts
	Support Hole ø 35 mm
	33° angle for monitor position